

Insulated Roofing

Roof Panel Configuration



Insulation Cutback Areas - Optional



Panels can be manufactured with the insulated portion cut back from the front or rear edges of the panel to provide overhang area/s which may be needed to accommodate guttering or other structure specific to your project.

Dimensions:



Cutbacks of 60mm (regular), 75mm, 100mm, 125mm, 150mm, 175mm, 200mm, 225mm and 250mm (max).
No Cut Back also available.

Direction of installation looking at the existing structure

Right to Left requires Right Hand Cutback:

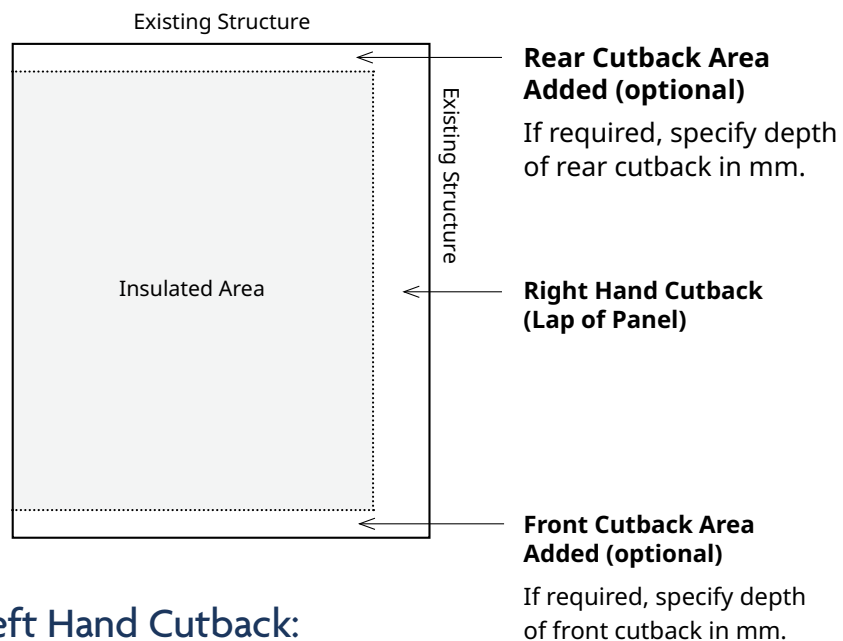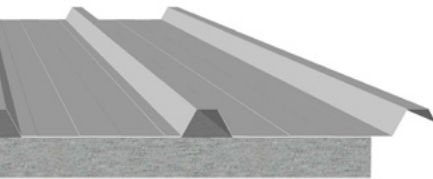

Left to Right requires Left Hand Cutback:

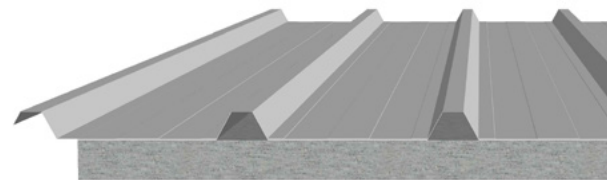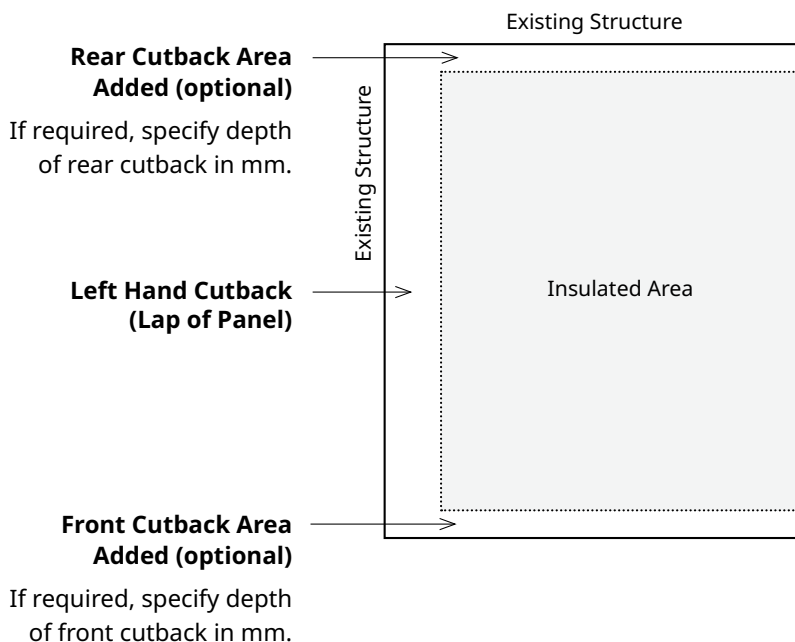

If cutback area/s are not specified, the insulation area will be flush with the front and rear edges of the steel sheeting.